



## Appearance




### FUNCTION INTERFACES

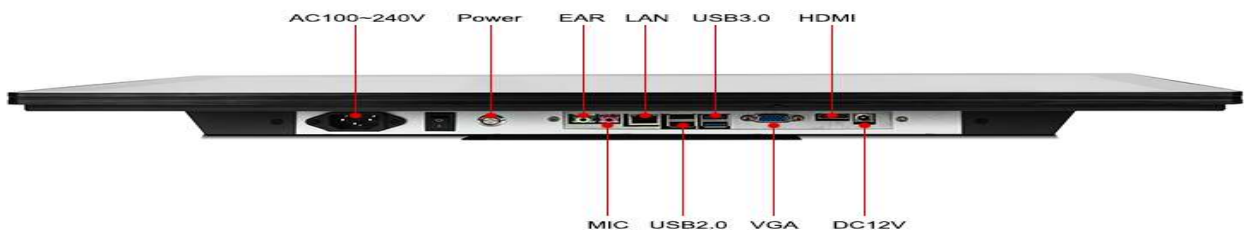

### Windows industrial all in one panel pc ports

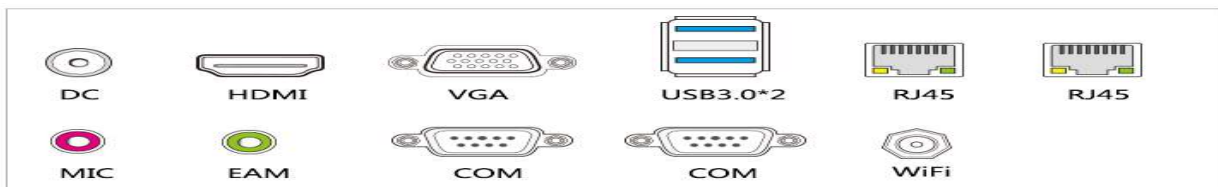

### Android all in one panel pc ports

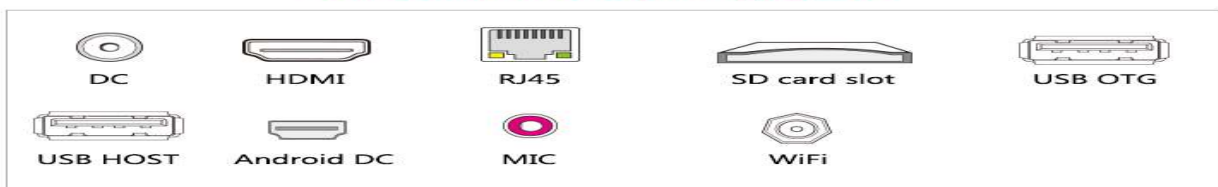

## Specification

| PC                  |                                                                                                     |
|---------------------|-----------------------------------------------------------------------------------------------------|
| CPU Standard        | Intel Core i3/i5/i7-7 <sup>th</sup> ,8 <sup>th</sup> ,10 <sup>th</sup> ,11 <sup>th</sup> Generation |
| Memory              | 8GB/16GB DDR4 RAM                                                                                   |
| Hard Drive Capacity | 128/256/512GB & 1TB SSD                                                                             |
| Graphics            | Integrated graphics HD Graphics and support 1080p HD photo quality                                  |
| Audio               | Realtek ALC662, High Definition Audio(HD),Line in,Line out                                          |
| Network             | 2×Realtek RTL8111H Gigabit Ethernet controller                                                      |
| Expansion           | 2*Mini-PCIE expansion slot, support WIFI/3G/4G/MSTA/GPS                                             |
| Ports               | USBx4                                                                                               |
|                     | HDMIx1                                                                                              |
|                     | VGAx1                                                                                               |
|                     | LANx2                                                                                               |
|                     | EARx1                                                                                               |
|                     | RS232x2                                                                                             |
|                     | MICx1                                                                                               |
|                     | PowerDC12V, 18W 9-36VOptional                                                                       |
| Operating System    | Support Windows 10/Windows 11/Linux operating system                                                |
| LCDpanel            |                                                                                                     |
| Panel size          | 15.6"                                                                                               |
| Display ratio       | 16:9                                                                                                |
| Resolution          | 1920*1080                                                                                           |
| Brightness          | 250 Nits                                                                                            |
| Response time       | 15ms                                                                                                |
| Contrast ratio      | 800:1                                                                                               |
| View angle          | 85°/85°/85°/85°(R/L/U/D)                                                                            |
| Color               | 16.7M                                                                                               |
| Touchpanel          |                                                                                                     |
| Touch screen Type   | 10Points projective capacitive touch                                                                |
| Touch Interface     | USB                                                                                                 |

# 15.6 inch Capacitive Touch Panel PC

|                              |                                                              |
|------------------------------|--------------------------------------------------------------|
| Touch response time          | <15ms                                                        |
| Luminousness                 | 75-85%                                                       |
| Protection                   | IP65                                                         |
| <b>Power Supply</b>          |                                                              |
| External Power Supply        | AC100-240V                                                   |
| Working voltage              | DC12V                                                        |
| Power consumption            | ≤65W                                                         |
| <b>Operating Environment</b> |                                                              |
| Temperature range            | operating:-10to60°C,storage:-20to70°C                        |
| Relative humidity            | 5%~95%@40°C,non-condensing                                   |
| Vibration                    | 5-500Hz,0.026G <sup>2</sup> /Hz,2.16Grms,X,Y,Z,1hourper axis |
| <b>Packing Details</b>       |                                                              |
| Packing detail               | 2panelPCinone carton                                         |
| Weight(G.W.)                 | 10KGaroundpercarton                                          |
| Accessories                  | Power adapter,Wifi antenna                                   |
| <b>Other</b>                 |                                                              |
| Mounting                     | Panel, VESA                                                  |
| Certification                | BIS, CE,FCC, RoHS                                            |
| Warranty                     | 1yearwarranty                                                |